


king K-600 Series

BODY SIZE: No. 2

600 Series (1 Valve)

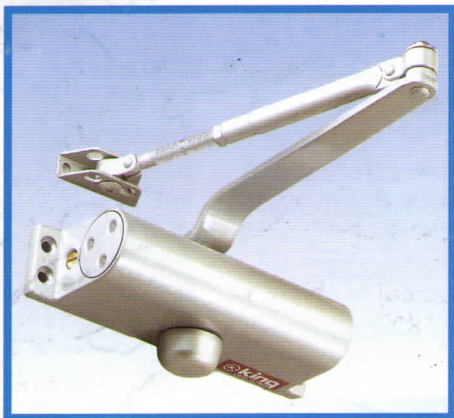


K-600 Series (1 Valve)

- The single valve regulates closing and latching speed.
- Economical model for home and office use.
- Three power sizes are available depending on the door weights as shown below.
- Door opening angle : Max.180°

K-600 Series (2 Valves)

- Closing and latching speed are controlled by two separate speed adjusting valves.
- Economical model for home and office use.
- Three power sizes are available depending on the door weights as shown below.
- Door opening angle : Max.180°

600 Series (2 Valves)

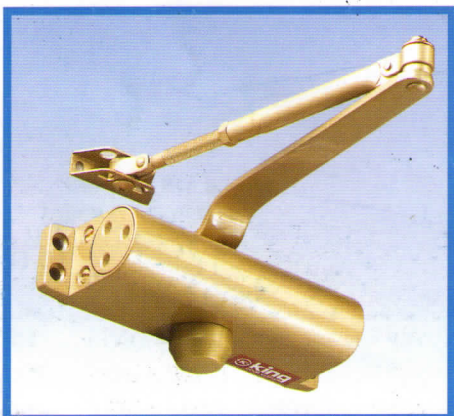

USAGE
K-600

5
Guaranteed
years

Mainly used in households, but the small size (No. 2) model is also convenient for office doors, exit doors, villas, etc. Installation on both right and left sides is possible. The model is guaranteed as long as five years.



Selection Chart

Body Size No. 2 (204x46x70mm)

| Standard Installation | | Parallel Installation | | W x H of Door(mm) | Weight of Door(kg) |
|-----------------------|-----------|-----------------------|-----------|-------------------|--------------------|
| Non Hold-Open | Hold-Open | Non Hold-Open | Hold-Open | | |
| - | - | 620P | 1620P | 800 x 1800 | 10-30 |
| 620 | 1620 | 630P | 1630P | 900 x 2100 | 25-45 |
| 630 | 1630 | 640P | 1640P | 950 x 2100 | 40-65 |
| 640 | 1640 | - | - | 1050 x 2400 | 60-85 |

* Hold-open : Built-in hold open type

Drawing of installation with standard type (Pull side)

(in mm)

