


king K-700 Series

BODY SIZE: No. 2

USAGE
K-700

5
Guaranteed
Years

700 Series (2 Valve)

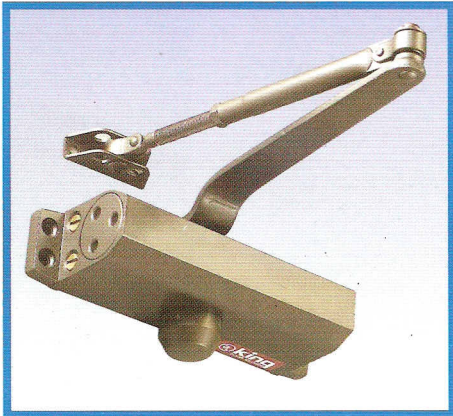



K-700 Series

- Two adjustment Valves : Closing and Latching speeds controlled by separate regulating valves, adjustable after installation
- Universal application. Non-handed for standard, top jamb or parallel arm installation.
- Hold-open arms are adjustable for holding from 90° ~180°

Mainly used for household doors, but also is installed for exit doors, office door, villas, etc. as the small size model (No.2) works smoothly. It is installed on both right and left sides and guaranteed as long as five years.

Option

- Built in hold-open function
- Hold-open forearm
- Parallel brackets for regular arm and Hold-open arm

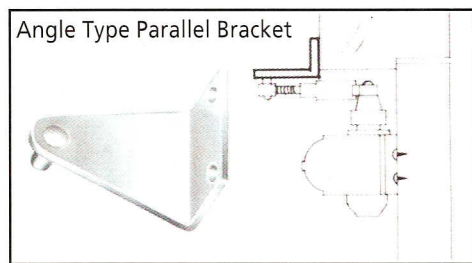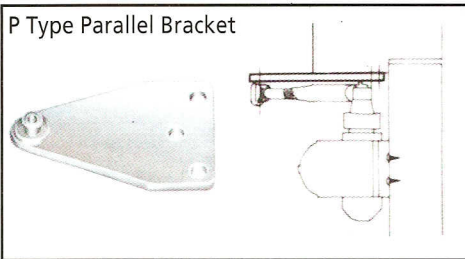

Selection Chart

Body Size No. 2 (204x46x70mm)

Standard Installation		Parallel Installation		W x H of Door(mm)	Weight of Door(kg)
Non Hold-Open	Hold-Open	Non Hold-Open	Hold-Open		
-	-	720P	1720P	800 x 1800	10-30
720	1720	730P	1730P	900 x 2100	25-45
730	1730	740P	1740P	950 x 2100	40-65
740	1740	-	-	1050 x 2400	60-85

* Hold-open : Built-in hold open type

Drawing of installation with parallel type (Push side)

(in mm)

